



TEMPEST1000WA

PG. 2

10000L

PG.6

TEMPEST900WA

PG.10

PG.12

PG.14

PG.18

8500PEN

TEMPEST800

PG. 20

TEMPEST775

PG. 24

PG. 26

TEMPEST770WA

TEMPEST7700PEN

PG. 28

TEMPEST700

PG. 30

TEMPEST650

PG. 32

TEMPEST600

PG. 33

TEMPEST**570**

PG. 34

TEMPEST530

PG. 35

TEMPEST470


PG. 36

TEMPEST43

PG. 37



EMPESTIOOOWA

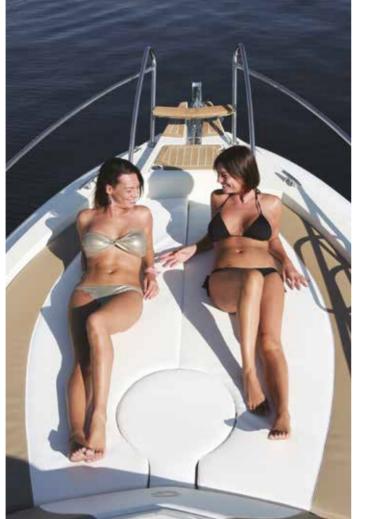











EMPEST1000W,








TECHNICAL FEATURES

LENGTH O.A. 10,07 mt
BEAM O.A. 3,35 mt
TUBE DIAMETER 0,65 mt max
DRY WEIGHT (approx.) 2900 kg
MAX. PEOPLE ON BOARD 18
MAX. ENGINE POWER 600 HP (2 XL)
CERTIFICATION CE B
TUBE Neoprene - Hypalon Orca® 1670 dtex



Design by Roberto Curtò



FMPESTIOOOOPEN











EMPESTIOOOOPEN








TECHNICAL FEATURES

LENGTH O.A. 10,07 mt BEAM O.A. 3,35 mt TUBE DIAMETER 0,65 mt max DRY WEIGHT (approx.) 2300 kg 22 MAX. PEOPLE ON BOARD 600 HP (2 XL) MAX. ENGINE POWER CERTIFICATION CE В Neoprene - Hypalon Orca® 1670 dtex TUBE




Design by Roberto Curtò







LENGTH O.A. 9,50 mt BEAM O.A. 3,30 mt TUBE DIAMETER 0,65 mt max DRY WEIGHT (approx.) 2400 kg MAX. PEOPLE ON BOARD 18 MAX. ENGINE POWER 500 HP (1 U / 2 XL) CERTIFICATION CE In progress TUBE Neoprene - Hypalon Orca® 1670 dtex










LENGTH O.A. 9,55 mt
BEAM O.A. 3,26 mt
TUBE DIAMETER 0,65 mt max
DRY WEIGHT (approx.) 1550 kg
MAX. PEOPLE ON BOARD 22
MAX. ENGINE POWER 500 HP (1 U / 2 XL)
CERTIFICATION CE B
TUBE Neoprene - Hypalon Orca® 1670 dtex






















LENGTH O.A. 8,85 mt
BEAM O.A. 3,28 mt
TUBE DIAMETER 0,60 mt max
DRY WEIGHT (approx.) 2200 kg
MAX. PEOPLE ON BOARD 16
MAX. ENGINE POWER 450 HP (1 U / 2 XL)
CERTIFICATION CE B
TUBE Neoprene - Hypalon Orca® 1670 dtex












LENGTH O.A. 8,50 mt
BEAM O.A. 3,25 mt
TUBE DIAMETER 0,65 mt max
DRY WEIGHT (approx.) 1900 kg
MAX. PEOPLE ON BOARD 16
MAX. ENGINE POWER 400 HP (1 U / 2 XL)
CERTIFICATION CE B
TUBE Neoprene - Hypalon Orca® 1670 dtex















EMPEST800










TECHNICAL FEATURES

LENGTH O.A. 7,91 mt BEAM O.A. 3.05 mt TUBE DIAMETER 0,64 mt max DRY WEIGHT (approx.) 1500 kg MAX. PEOPLE ON BOARD 15/18 300 HP (1 XL) MAX. ENGINE POWER CERTIFICATION CE B/C Neoprene - Hypalon Orca® 1670 dtex TUBE















LENGTH O.A. 7,75 mt BEAM O.A. 3,00 mt TUBE DIAMETER 0,65 mt max DRY WEIGHT (approx.) 1350 kg MAX. PEOPLE ON BOARD 12/22 250 HP (1 XL) MAX. ENGINE POWER CERTIFICATION CE B/C TUBE Neoprene - Hypalon Orca® 1670 dtex








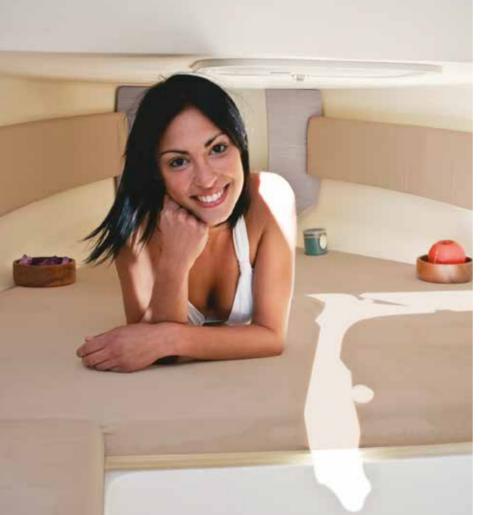





LENGTH O.A. 7,70 mt BEAM O.A. 2.98 mt TUBE DIAMETER 0,54 mt max DRY WEIGHT (approx.) 1600 kg MAX. PEOPLE ON BOARD 18 MAX. ENGINE POWER 250 HP (1 XL) CERTIFICATION CE С TUBE Neoprene - Hypalon Orca® 1670 dtex




Design by Roberto Curtò







LENGTH O.A. 7,75 mt BEAM O.A. 2.97 mt TUBE DIAMETER 0,65 mt max DRY WEIGHT (approx.) 1250 kg MAX. PEOPLE ON BOARD 22 250 HP (1 XL) MAX. ENGINE POWER CERTIFICATION CE С TUBE Neoprene - Hypalon Orca® 1670 dtex











LENGTH O.A. 7,15 mt BEAM O.A. 2,85 mt TUBE DIAMETER 0,58 mt max DRY WEIGHT (approx.) 1050 kg MAX. PEOPLE ON BOARD 16 MAX. ENGINE POWER 225 HP (1 XL) CERTIFICATION CE С TUBE Neoprene - Hypalon Orca® 1670 dtex






LENGTH O.A. 6,55 mt
BEAM O.A. 2,67 mt
TUBE DIAMETER 0,56 mt max
DRY WEIGHT (approx.) 800 kg
MAX. PEOPLE ON BOARD 12
MAX. ENGINE POWER 200 HP (1 XL)
CERTIFICATION CE C







LENGTH O.A. 5,92 mt BEAM O.A. 2,50 mt TUBE DIAMETER 0,55 mt max DRY WEIGHT (approx.) 600 kg MAX. PEOPLE ON BOARD 12 MAX. ENGINE POWER 140 HP (1 L) CERTIFICATION CE Neoprene - Hypalon Orca® 1670 dtex TUBE








SIMPESION OF THE PROPERTY OF T

TECHNICAL FEATURES

LENGTH O.A. 5,60 mt
BEAM O.A. 2,60 mt
TUBE DIAMETER 0,56 mt max
DRY WEIGHT (approx.) 551 kg
MAX. PEOPLE ON BOARD 12
MAX. ENGINE POWER 135 HP (1 L)
CERTIFICATION CE C
TUBE Neoprene - Hypalon Orca* 1100 dtex







 LENGTH O.A.
 5,35 mt

 BEAM O.A.
 2,25 mt

 TUBE DIAMETER
 0,50 mt max


 DRY WEIGHT (approx.)
 450 kg

 MAX. PEOPLE ON BOARD
 9

 MAX. ENGINE POWER
 110 HP (1 L)

 CERTIFICATION CE
 C

 TUBE
 Neoprene - Hypalon Orca* 1100 dtex



SHOW CONTRACTOR OF THE CONTRAC





TEMPES V

TECHNICAL FEATURES

 LENGTH O.A.
 4,72 mt

 BEAM O.A.
 2,13 mt

 TUBE DIAMETER
 0,50 mt max


 DRY WEIGHT (approx.)
 350 kg

 MAX. PEOPLE ON BOARD
 7

 MAX. ENGINE POWER
 70 HP (1 L)

 CERTIFICATION CE
 C

 TUBE
 Neoprene - Hypalon Orca* 1100 dtex





Design by Roberto Curtò





 LENGTH O.A.
 4,22 mt

 BEAM O.A.
 2,03 mt

 TUBE DIAMETER
 0,45 mt max

 DRY WEIGHT (approx.)
 300 kg


 MAX. PEOPLE ON BOARD
 6

 MAX. ENGINE POWER
 40 HP (1 L)

 CERTIFICATION CE
 C

 TUBE
 Neoprene - Hypalon Orca* 1100 dtex





4 WES







DOTAZIONI - EQUIPMENT	1000 WA	1000 OPEN	900 WA	900 OPEN	850 WA	850 OPEN	800	775	770 WA	770 OPEN	700	650	600	570	530	470	430
Asta da sci - Ski bar	•	•	•		•	•	•	•	•	•	•	•	•	•1	•	•	
Bussola - Compass																	
Centralina servo sterzo - Sea Star power assistant	•	•	•		•												
Copriconsolle - Console cover										•				•		•	
Copripanca - Bench cover	•	•	•	•	•	•	•	•	•		•	•	•	•	•		
Cuscini di prua - Fore sunbathing cushions													•	•	•	•	•
Doccia - Shower											•	•	•	•	•		
	lt.77	lt.107	lt.60	lt.60	lt.70	lt.60	lt.67	lt.67	lt.60	lt.60	lt.45	lt.67	lt.45	lt.45	lt.45		
Fornello - Cooker							PODTABLE	PORTABLE									
Frigorifero - Refrigerator				•			PORTABLE	PORTABLE	•	•							
	lt.48	lt.48	lt.48	lt.48	lt.48	lt.48	lt.48	lt.48	lt.30	lt.30							
Gonfiatore - Inflating pump	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC		ELECTRIC	TRAY SYSTEM		-				_	_
Impiente 220V Deckeide guwent ten 220V	_		•		•		_	_	•		_						
Impianto 220V - Dockside current tap 220V	•	•															
Luci di navigazione - Navigation lights												ON A-FRAME	ON A-FRAME	ON ARCH	ON A-FRAME	ON A-FRAME	<u> </u>
Kit pulizia - Polishing kit										-							
Kit plancette poppa - Stern platforms kit	WITH FLEXITEEK	WITH FLEXITEEK		WITH FLEXITEEK		WITH FLEXITEEK			WITH FLEXITEEK	WITH FLEXITEEK	WITH FLEXITEEK						
Musone prua VTR - GRP Bow roller																	
Pagaie - Paddles																	
Panca guida leaning post - Leaning post													•				
Panca guida VTR - GRP Steering bench																	
Pannello elettrico - Electric panel																	
Parabrezza - Windscreen																	
Pompa sentina - Bilge pump	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMAT
Prendisole addiz. Poppa - Add. aft sunbathing kit	•		•		•	•	•	•	•	•	•	•	•				
Pulpito - Stainless steel pulpit		•				•											
Radio		•	•	•	•	•	•	•	•	•	•	•					
Rivest, flexiteek trincarini - Flexiteek covering on stringers											0 2	•	•	•			
Rivest flexiteek pozzetto - Flexiteek covering on cockpit	•	•	●3	•	-3	•	●3	●3	•	•	•	•	•	•			
Roll-bar inox - Stainless steel A-frame				•			•		•			•	•	•	•	•	
Roll-bar VTR - GRP A-frame			•				•	•	•		•4						
Scaletta - Ladder																	•
Serbatoio benzina - Fuel tank															•		_
(Circa - Approx)	lt.500	lt.390	lt.350	lt.365	lt.325	lt.390	lt.300	lt.250	lt.215	lt.195	lt.205	lt.205	lt.130	lt.86	lt.86		
Soft-top inox - SS soft-top	•	•	6 5	•													
Tavolo - Table													PLASTIC		•	•	
Telo ricovero - Boat storage cover			•		•	•	•	•	•	•	•	•	•	•	•	•	•
Tendalino per Roll-bar - Sunshade arch for A-frame	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	
Tendalino - Sunshade arch			•				•		•			•	•	•	•	•	
Timoneria idraulica - Hydraulic steering												•					
Verricello elettrico - Electric winch							•	•	•	•	•						
					_						-						

Standard • Optional

Tutte le caratteristiche relative all'intera gamma non sono vincolanti, Cantieri Capelli si riserva il diritto di modificarle senza preavviso. Le imbarcazioni raffigurate possono essere equipaggiate con accessori optional;

All features and data concerning our whole production are not binding. The shipyard Capelli reserves the right to modify them without advance notice. The boats shown can be equipped with additional options.







¹ Disponibile optional arco sci nautico; Available optional water ski arch lnclude rivestimento su delfiniera; Includes covering on bow roller

³ Include rivestimento su plancia poppa; Includes covering on stern platform

⁴ Obbligatorio optional flexiteek trincarini; Flexiteek on stringers option has to be added 5 Disponibile optional T-top; Available optional T-top



